


WOOFER

My 6K

- 1 Surround in gomma.
- 2 Gasket in ABS per iniezione.
- 3 Cono in FIBREGLASS.
- 4 Trecciole argentate.
- 6 Terminali 4,8x7,2 mm.
- 7 Cestello a norme DIN in lamiera con trattamento texture anti-corrosivo.

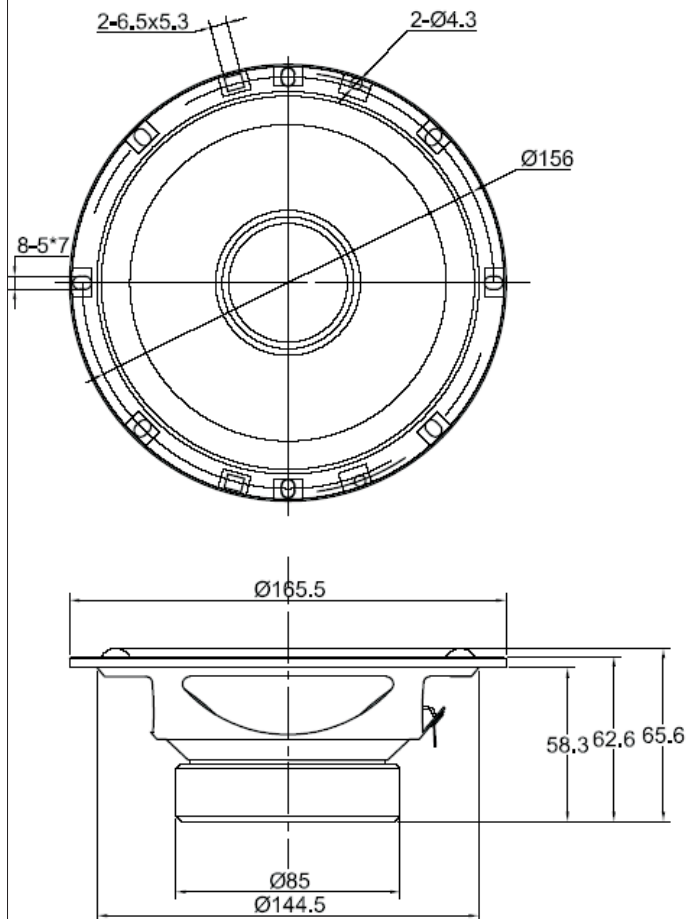

Frequency range	78 -6000	Hz
Equivalent volume, Vas	9.203	L
Compliance, Cms	0.0033	mm/N
Mechanical resistance, Rms	3.2	Ns/m
Effective diaphragm/cone area, Sd	141	cm ²
Voice coil diameter	25.9	mm
Voice coil height	7	mm
Air gap height	4	mm
Linear excursion, Xmax	± 1.5	mm
Max mechanical excursion	± 8	mm
Nominal impedance	4	ohm
Voice coil resistance	3.54	ohm
Voice coil inductance	0.204	mH
Free air resonance, Fs	77.44	Hz
Sensitivity, Spl (2.83V/1m)	90.6	dB
Force factor, Bxl	3.133	Tm
Moving mass, Md	12.963	g
Qms	2.316	
Qes	2.274	
Qts	1.148	
Nominal power	60	W
Short term max power	240	W
Long term max power	120	W

SPL vs Freq





TWEETER


My 6K

- 1 Tweeter con cupola in seta da 25mm.
- 2 Magnete al neodimio ad alta temperatura di smagnetizzazione.
- 3 Molteplici accessori di installazione disponibili.
- 4 Crossover dedicato 12dB/oct.
- 5 Cablaggio ad innesco rapido saldato sui terminali tweeter

Frequency range	2500 - 22000	Hz
Equivalent volume, Vas	0.0848	L
Compliance, Cms	0.002326	mm/N
Mechanical resistance, Rms	3.6	Ns/m
Effective diaphragm/cone area, Sd	5.067	cm ²
Voice coil diameter	25.4	mm
Voice coil height	1.5	mm
Air gap height	1.35	mm
Linear excursion, Xmax	± 0.08	mm
Max mechanical excursion	± 0.5	mm
Nominal impedance	4	ohm
Voice coil resistance	4.016	ohm
Voice coil inductance	0.095	mH
Free air resonance, Fs	1288	Hz
Sensitivity, Spl (2.83V/1m)	91.8	dB
Force factor, Bxl	10.717	Tm
Moving mass, Md	0.0065582	g
Qms	1.383	
Qes	1.856	
Qts	0.793	
Nominal power	40	W
Short term max power	160	W
Long term max power	80	W

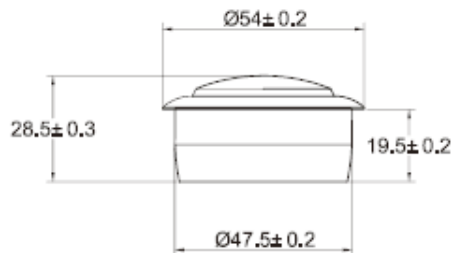

SUPPORTI

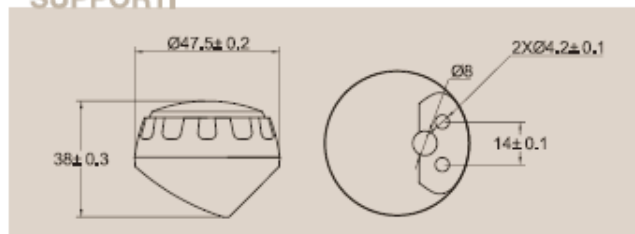

SPL vs Freq

