






SCAN-SPEAK

## TWEETER

## R2904/700000

Frequency range	2-40 KHz
Equivalent volume, Vas	--- L
Mechanical resistance, Rms	--- Ns/m
Effective diaphragm/cone area, Sd	5.6 cm <sup>2</sup>
Voice coil diameter	25 mm
Linear excursion	±0.20 mm
Nominal impedance	4 ohm
Voice coil resistance	3.0 ohm
Voice coil inductance	0.01 mH
Free air resonance, Fs	520 Hz
Sensitivity, Spl (2.83V,1m)	94.5 dB
Force factor, Bxl	2.80 Tm
Moving mass, Md	0.30 g
Qms	---
Qes	---
Qts	---
Nominal power	100 W
Total weight of driver	--- g

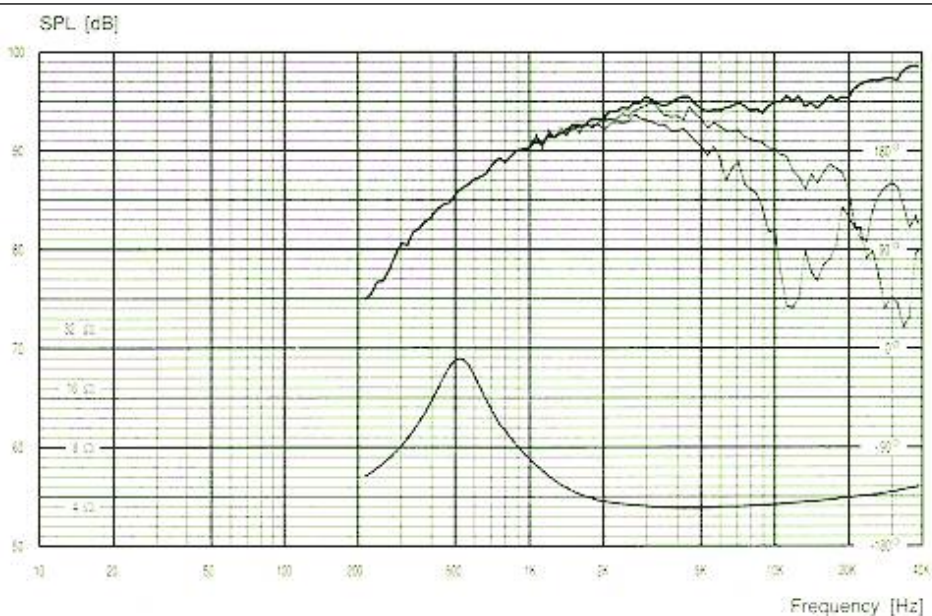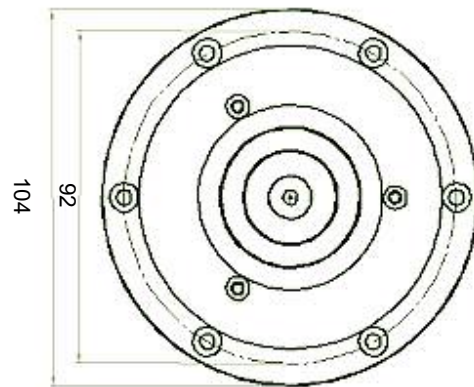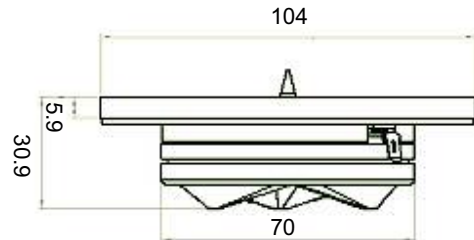

E.B. ACOUSTIC & ELECTRONIC RESEARCH S.R.L.

Via S. Bartolomeo, 10 - 28047 OLEGGIO (NO) Italy Ph. 0039 0321 91430 - Fax 0039 0321 94411

[www.ebacoustic.it](http://www.ebacoustic.it)