
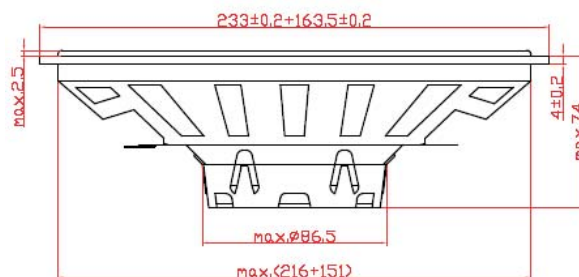


COAXIAL

TG 69X

- 1 Surround in gomma.
- 2 Gasket in ABS per iniezione.
- 3 Cono Silver in cellulosa trattata.
- 4 Trecciole argentate.
- 5 Tweeter al neodimio.
- 6 Terminali placcati oro 4,8x7,2 mm.
- 7 Cestello a norme DIN in lamiera con trattamento texture anti-corrosivo.

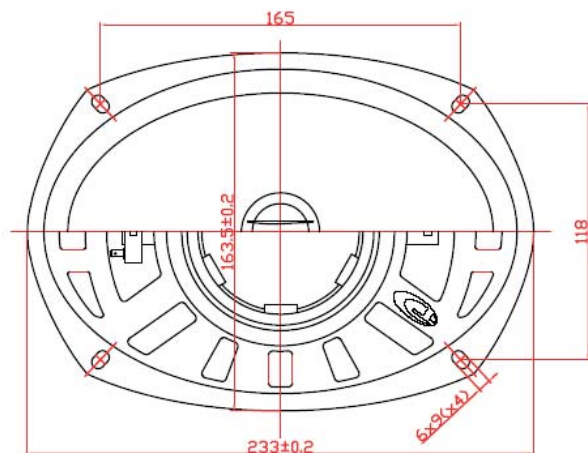

| | |
|-----------------------------------|--------------------------|
| Frequency range | 55 - 20000 Hz |
| Equivalent volume, Vas | 0,001/18 Lt |
| Compliance, Cms | 0,04/0,35 mm/N |
| Effective diaphragm/cone area, Sd | 4,09/205 cm ² |
| Voice coil diameter | 13/38 mm |
| Voice coil height | 1,05/13 mm |
| Air gap height | 2/6 mm |
| Linear excursion, Xmax | ± -/4 mm |
| Max mechanical excursion | ± -/6 mm |
| Nominal impedance | 4/4 ohm |
| Voice coil resistance | 3,1/3,55 ohm |
| Voice coil inductance | 0,03/0,13 mH |
| Free air resonance, Fs | 2000/54 Hz |
| Sensitivity, Spl (2.83V/1m) | 89/91 dB |
| Force factor, Bxl | -/6,2 Tm |
| Moving mass, Md | 0,2/14,9 g |
| Qms | -/3,88 |
| Qes | -/1,12 |
| Qts | -/0,87 |
| Nominal power | 80 W |
| Short term max power | 320 W |
| Long term max power | 160 W |

