


COAXIAL

XP69X

- 1 Surround in gomma.
- 2 Gasket in ABS per iniezione.
- 3 Cono in cellulosa trattata.
- 4 Trecciole argentate.
- 5 Tweeter e Midrange ad alta efficienza.
- 6 Terminali placcati oro 4,8x7,2 mm.
- 7 Cestello a norme DIN in lamiera con trattamento anti-corrosivo.

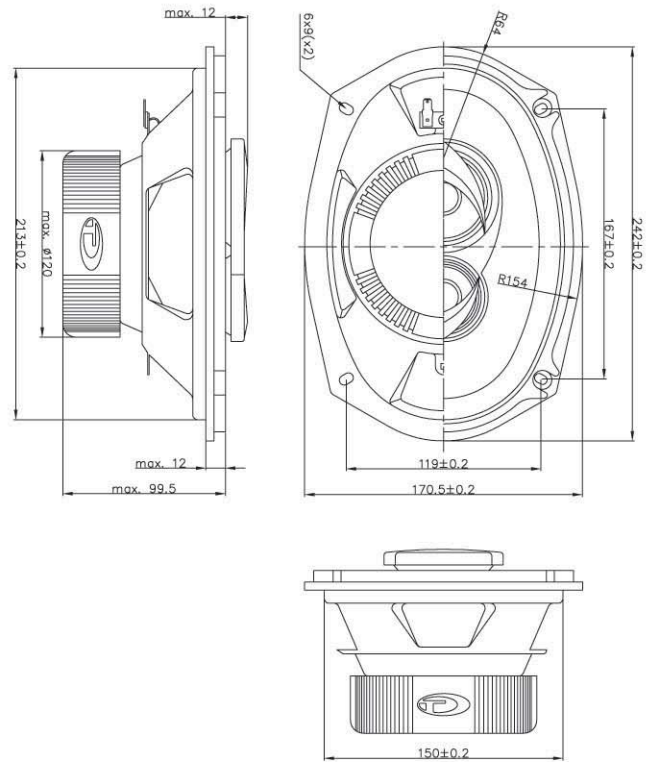

Frequency range	Hz	40-20000		
		Tw	Md	W
Equivalent volume, Vas	L	0.001	0,001	20
Compliance, Cms	mm/N	0.04	0.05	0.33
Mechanical resistance, Rms	Ns/m	--	--	1.52
Effective diaphragm/cone area, Sd	cm ²	15	27	204
Voice coil diameter	mm	13	13	40
Voice coil height	mm	3	3	13
Air gap height	mm	3	3	6
Linear excursion, Xmax	mm	--	--	±3,5
Max mechanical excursion	mm	--	--	±6
Nominal impedance	ohm	4	4	4
Voice coil resistance	ohm	3.1	3.1	3.1
Voice coil inductance	mH	0.03	0.04	0.24
Free air resonance, Fs	Hz	2000	1000	60
Sensitivity, Spl (2.83V/1m)	dB	89	89	91
Force factor, Bxl	Tm	--	--	6,8
Moving mass, Md	g	0.2	0,2	15
Qms	--	--	--	1,15
Qes	--	--	--	0,54
Qts	--	--	--	0,37
Nominal power	W	25	25	100
Short term max power	W	80	100	250
Long term max power	W	40	40	150
Total weight of driver	g	53	189	1763

